

# Steadman LiftSystems<sup>LLC</sup> specifications comparison sheet

Patricia Steadman 913.244.5699

Denka-Lift, ReachMaster and Hinowa specialty manlift equipment rental

NOTE: Nationwide rates \$ vary depending on length of rental



**DENKA LIFT** DL77



**Hinowa** LL63




**DL72N**



**DL72N**



**DL82N**

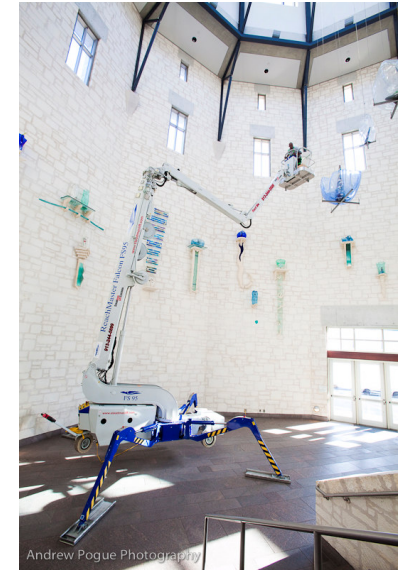

**Falcon spider FS95**



	LL63	DL72N	DL77	DL82N	FS95	FS105
<b>Maximum working height</b>	56 to 62.5 ft	72 ft	77 ft	82 ft	95 ft	105 ft
<b>Maximum load in basket/platform</b>	440 lbs 2 person	440 lbs 2 person	440 lbs 2 person	440 lbs 2 person	440 lbs 2 person	440 lbs 2 person
<b>Detachable Basket, with Rotation</b>	124° (2x62°)	90° (2x45°)	n/a	90° (2x45°)	180° (2x90°)	180° (2x90°)
<b>Maximum outreach</b>	15.7 to 21 ft	39.37 ft	31 ft	34.8 ft	46 ft	46 ft
<b>Minimum length</b>	13.7 ft	21.4 ft	23 ft	17 ft 10 in	20.7 ft	23.6 ft
<b>Minimum height</b>	6 ft 6 in	6 ft 6 in	6 ft 6 in	6 ft 6 in	6 ft 6 in	6 ft 6 in
<b>Minimum width</b>	31.2 in	35 in	64 in	34.5 in	31.2 in	31.2 in
<b>Overall weight</b>	4,576 lbs	5,070 lbs	4,500 lbs	5,320 lbs	8,268 lbs	9127 lbs
<b>Max. ground pressure under 1 outrigger plate</b>	27.56 psi without plates (8.99 press. under tracks)	15.3 psi	17.67 psi	17.7 psi	34.1 psi	41 psi
<b>Self propelled drive system Gradability (std drive)</b>	20°/36% max climb angle	12°/21% max climb angle	n/a	12° - 15° max slope	5°/10% climb angle	5°/10% climb angle

Look no more . . .

our manlifts fit thru standard doors, light enough for marble floors !